





MAZDA CX-60

(2022-)

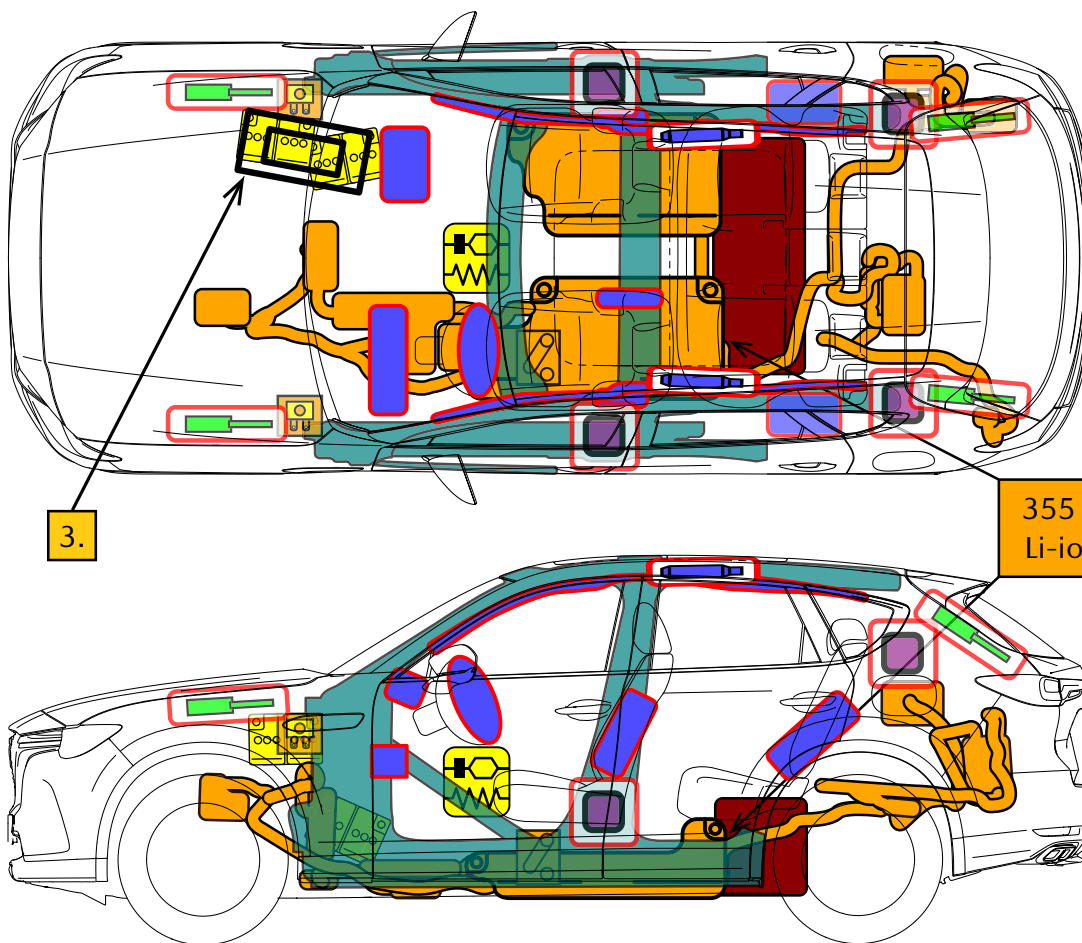


	Airbag		Stored gas inflator		Seat belt pre-tensioner		SRS control unit		Gas strut / Preloaded spring
	High strength zone		Zone requiring special attention						
	Battery low voltage		High voltage battery pack		High voltage power cable / component		High voltage disconnect		Fuse box disabling high voltage system
	Fuel tank content gasoline / ethanol								

MAZDA CX-60 (2022-)

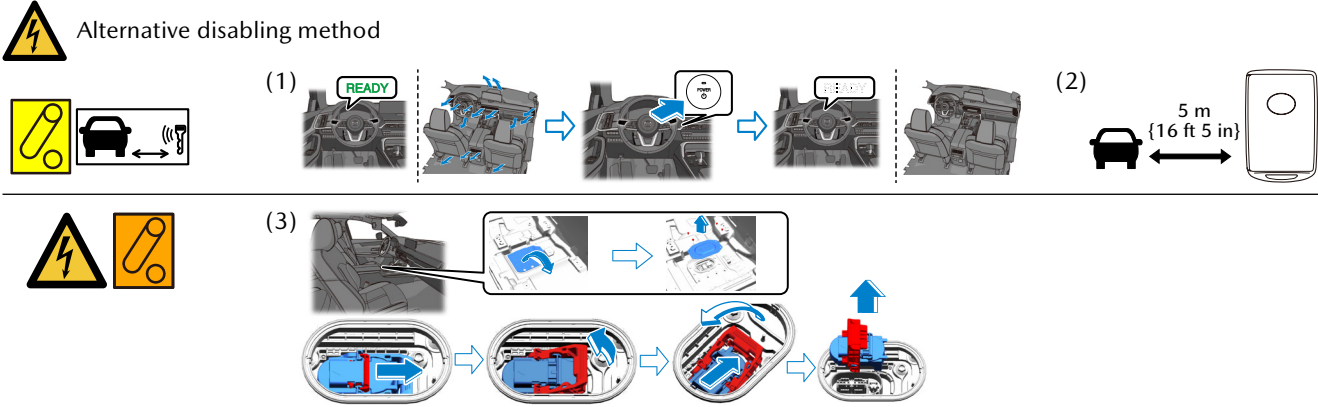


4.Access to the occupants


Glass types

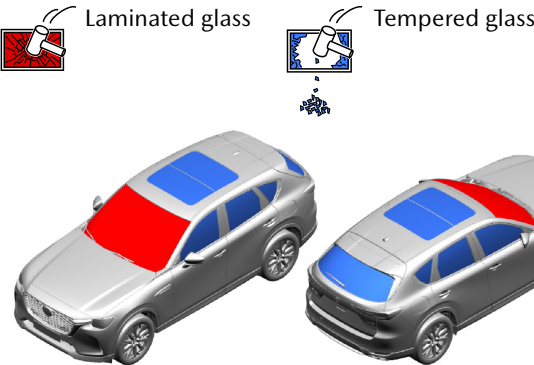


Steering wheel angle adjustment

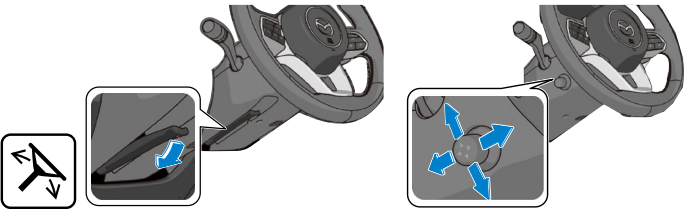

Seat position operation

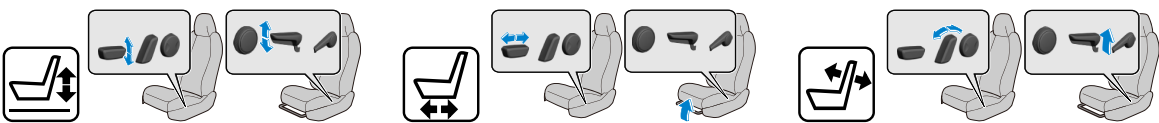

High strength steel in body

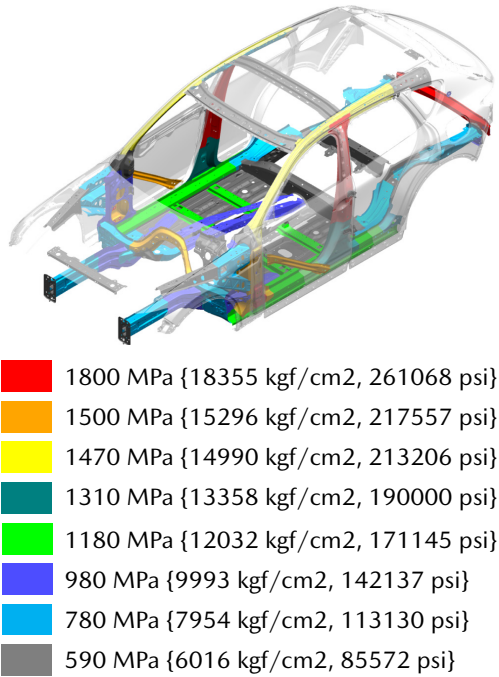

5.Stored energy / liquids / gases / solids

	Li-ion / DC 355V	
	Pb / DC 12V	
	R-1234yf / 1210 g {42.68 oz}	
	Gasoline / 50.0 L {13.2 US gal, 11.0 Imp gal}	



THE BATTERY ASSEMBLY COVER SHOULD NEVER BE BREACHED OR REMOVED UNDER ANY CIRCUMSTANCES, INCLUDING FIRE. DOING SO MIGHT RESULT IN SEVERE ELECTRIC BURNS, SHOCKS, OR ELECTROCUTION.

MAZDA CX-60 (2022-)

6.In case of fire



EXTINGUISH THE FIRE USING LARGE AMOUNTS OF WATER OR AN ABC FIRE EXTINGUISHER.





BATTERY RE-IGNITION!

7.In case of submersion



- DO NOT TOUCH ANY HIGH VOLTAGE PARTS WHEN THE VEHICLE IS SUBMERGED OR PARTIALLY SUBMERGED IN WATER.
- IF THE HIGH VOLTAGE BATTERY IS DAMAGED OR YOU ARE UNSURE WHETHER OR NOT IT IS DAMAGED, PERFORM THE RESCUE OPERATION WHILE WEARING THE APPROPRIATE INSULATING PROTECTIVE EQUIPMENT.
- AFTER PULLING THE VEHICLE OUT OF THE WATER, DRAIN THE INTERIOR OF THE VEHICLE AND REMOVE THE SERVICE PLUG.

8.Towing / transportation / storage

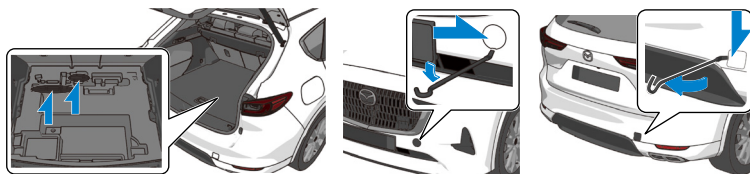

BATTERY RE-IGNITION!



KEEP THE VEHICLE OUTDOORS AWAY FROM FLAMMABLES.

10. Explanation of pictograms used

	Hybrid Electric Vehicle on fuel of liquid group2		General warning sign		Hazardous to the human health
	Bonnet		Warning, Electricity		Remove smart key
	Device to shut down power in vehicle		Use thermal Infrared camera		Door-lock control
	Steering wheel, tilt control		Use water to extinguish the fire		Window lift (power-operated)
	Seat adjustment, longitudinal		Use ABC powder to extinguish the fire		Parking brake
	Seat height adjustment		Explosive		Laminated glass
	Seat adjustment, seat back recline		Gases under pressure		Tempered glass
	Lifting point; central support		Flammable		
	Air conditioning component		Corrosives		