



NIO ET7
4 door, 5 seater, Sedan
2022 -



7. In Case of Submersion

Tilt the vehicle to one side to allow water to drain out of the vehicle and the high voltage battery.


Wear appropriate PPE. Remove the vehicle from the water and continue with normal high voltage disconnection (see chapter 3). Vehicles submerged in salt water should be handled with a greater potential risk of a high voltage battery fire.

8. Towing / Transportation / Storage


STORE AT SAFE DISTANCE FROM OTHER VEHICLES!



BATTERY RE-IGNITION!

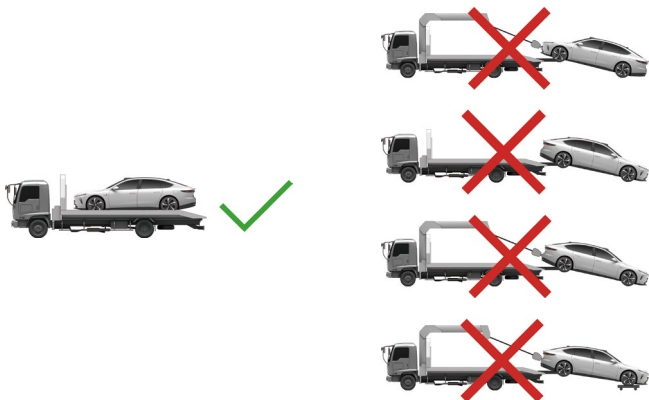

Towing/transportation method



Hook storage



Hook location

9. Important Additional Information

Manufacturer information NIO


For further details, please refer to “Emergency Response Guide”.

10. Explanation of Pictograms Used

	Warning high voltage		Flammable
	Caution		Hazardous to the human health
	Air-conditioning component		Acute toxicity
	Electric vehicle		Corrosives
	Bonnet		Gases under pressure
	Boot		Explosive
	Use thermal Infrared camera		Use water to extinguish the fire



NIO ET7
4 door, 5 seater, Sedan
2022 -

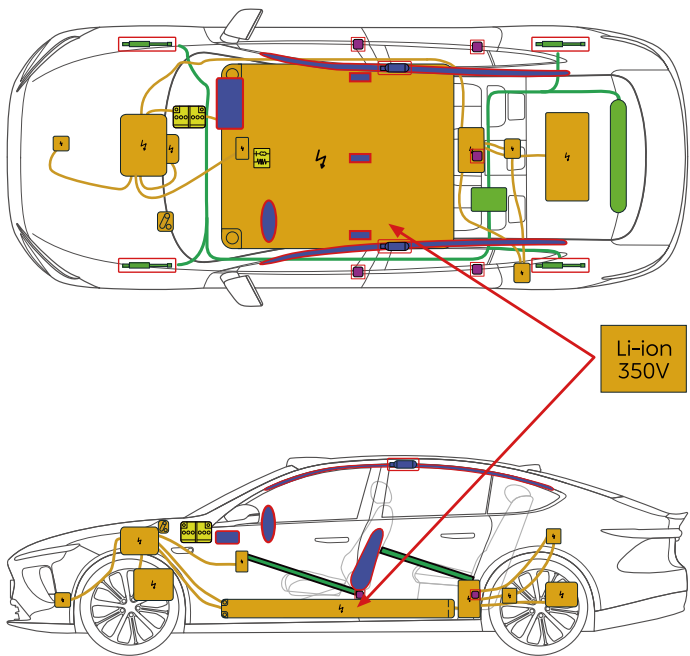

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut/Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable/component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage
	Gas line								



1. Identification/recognition



Silent movement or instant restart capability exists until vehicle is fully shut down.



Model name



Brand name


2. Immobilisation / Stabilisation / Lifting

A. IMMOBILIZE THE VEHICLE:

1. Shift the vehicle to P gear;
2. Turn on the hazard warning lamp on the central console.



B. LIFTING POINTS:

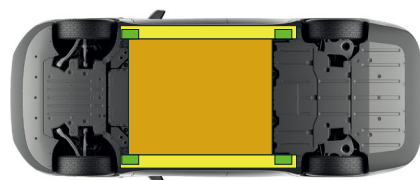


- Appropriate lifting points
- Appropriate points vehicle on side
- High voltage battery

3. Disable Direct Hazards / Safety Regulations




Be aware that not every high voltage component is labelled.
Always wear the appropriate PPE (Rubber insulated gloves / insulated rubber shoes / tools with insulating protective cover / goggles). Do not attempt to open the high voltage battery.

MAIN DISABLING METHOD

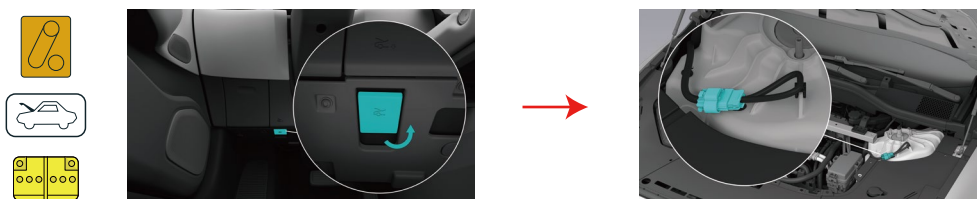


ACCESS TO 12V BATTERY

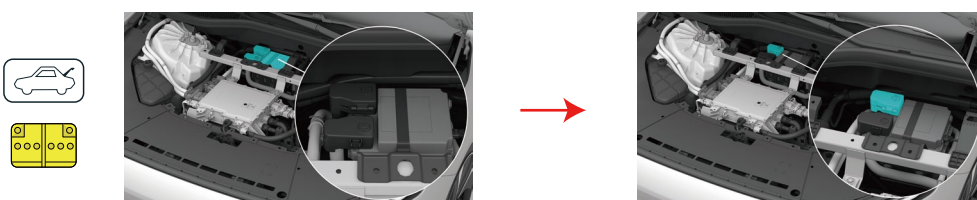

4. Access to the Occupants




Driver seat adjustment (electric)

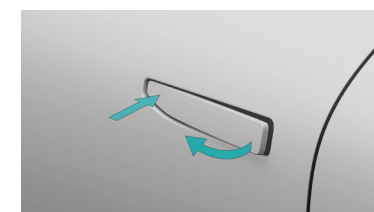

Exterior door handle



Passenger seat adjustment (electric)

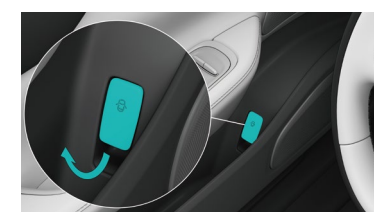

Emergency interior door handle



Steering column adjustment



Door latch

Glass types:



5. Stored Energy / Liquids / Gases / Solids

		12V
		350V
		1000g

6. In Case of Fire



USE LARGE AMOUNTS OF WATER



BATTERY RE-IGNITION!



DO NOT SUBMERGE VEHICLE TO EXTINGUISH BATTERY