




SUZUKI e VITARA

Electric Vehicle model

5 doors / 5 seats

From 2025

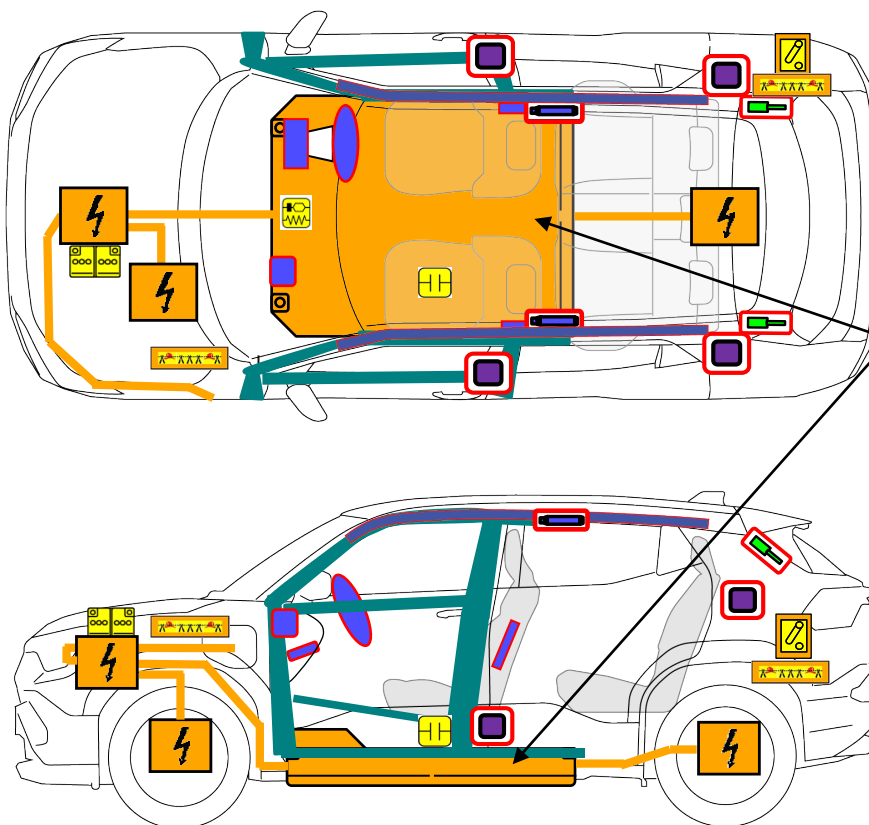

【2WD(49kwh)】 305.3V Li-ion
【2WD(61kwh)&4WD】 381.6V Li-ion

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Gas strut/Preloaded spring
	High strength zone		Battery low voltage		Battery pack, high-voltage		High voltage power cable		High voltage component
	Low voltage device that disconnects high voltage		Ultra capacitor, low voltage		Cable cut				
ID No.				Version No.		Version date		Page	
A8I049/A8I061				01		2025		1 / 5	

1. Identification / Recognition

- Location of vehicle badges

Lack of engine noise does not mean vehicle is off : silent movement or instant restart capability exists until vehicle is fully shut down wear appropriate ppe.



The charging port is located on the left-side panel.



The model name and the SUZUKI emblem are on the tailgate

2. Immobilisation / Stabilisation / Lifting

- Immobilise the vehicle


- Chock the wheels and engage the parking brake.





- Set ignition "ON".
- Press the P position switch.

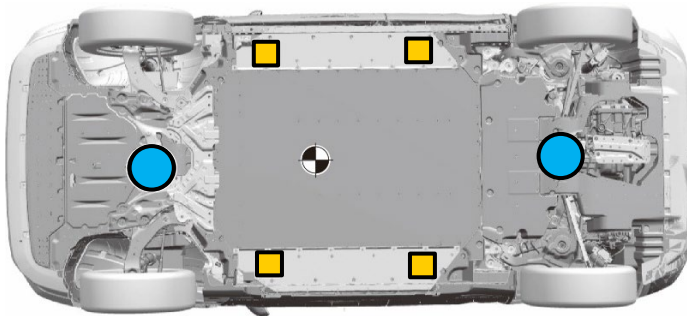


- Lifting points



 Floor jack position

 Position of center of gravity without load in vehicle

 Support position for frame contact hoist and safety stand



Do not place supports such as wooden blocks or life pillows under the exhaust system, fuel system, or high-voltage cables. Doing so can cause fuel leakage, fire, or electric shock.

3. Disable Direct Hazards / Safety Regulations

- If any of the following systems are required to be operated, operate them BEFORE disconnecting the battery.


Power door lock Power window Back door

When the 12 V battery is disconnected, electrical components cannot be operated.

If the charging cable is connected to the vehicle, please disconnect the charging connector.

	ID No.	Version No.	Version date	Page
	A8I049/A8I061	01	2025	2 / 5


Main disabling method



Set ignition "OFF".




Move 20 feet away from the vehicle.




Disconnect negative (-) cable at battery.


Alternative disabling method 1



Open the tailgate and Remove quarter lower trim cap.

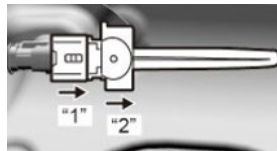

Slide the lock toward arrow 1, then pull the service plug toward arrow 2.



Disconnect negative (-) cable at battery.


Alternative disabling method 2

NOTE


Cut the labelled cables(1) in either the motor compartment or the luggage compartment.





Motor compartment



Luggage compartment



Access to 12 V Battery




Disconnect negative (-) cable at battery.

4. Access to the Occupants

Glass types

Laminated

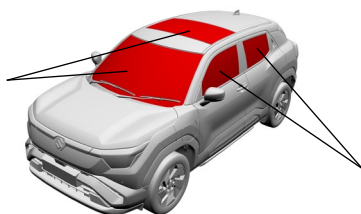


Tempered



Tempered

Steering column adjustment

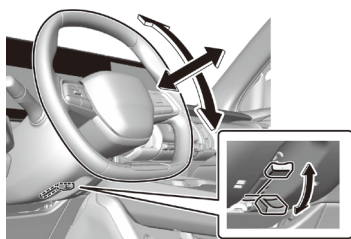















Manual seat adjustment



Power seat adjustment



5. Stored Energy / Liquids / Gases / Solids

	  	12V
	     	305.3V 2WD(49kwh) 381.6V 2WD(61kwh),4WD
	 	HFO-1234yf 570 – 630g HFC-134a 650 – 710 g

6. In Case of Fire



For first-aid fire extinguishing, pour enough water from fire hydrant etc. Plenty of water may cool the system.



Use a thermal imaging camera to detect an increase in temperature at the high-voltage components



Lithium-ion batteries can self-ignite or re-ignite after fire-fighting measures!


	ID No.	Version No.	Version date	Page
	A8I049/A8I061	01	2025	4 / 5

7. In Case of Submersion



Work on the vehicle only after the vehicle has been pulled out of the water.

8. Towing / Transportation / Storage

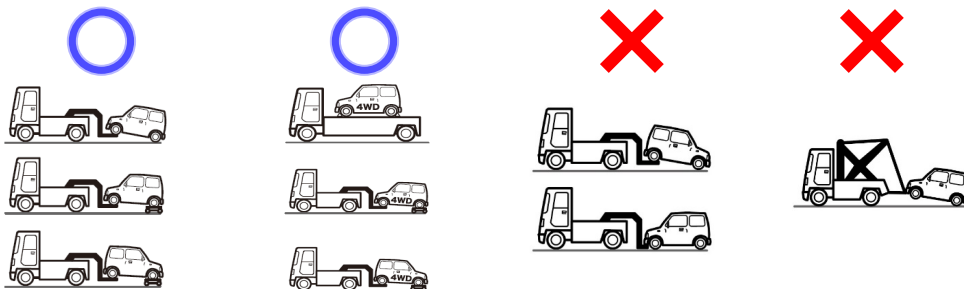

Lithium-ion batteries can self-ignite or re-ignite after fire-fighting measures!

Store the vehicle at a safe distance (15 m (49.2 ft) or more) from other vehicles.

















High-voltage battery: there is a possibility of re-ignition!

9. Important Additional Information

For further details, please refer to “Emergency Response Guide”.

10. Explanation of Pictograms Used

	General warning sign		Flammable		Remove smart key
	Warning, Electricity		Corrosives		Bonnet
	Electric Vehicle		Explosive		Boot
	Air-conditioning		Hazardous to the human health		Use thermal Infrared camera
	Use water to extinguish		Acute toxicity		