


# LUCID

## LUCID AIR SEDAN 2022 - Present

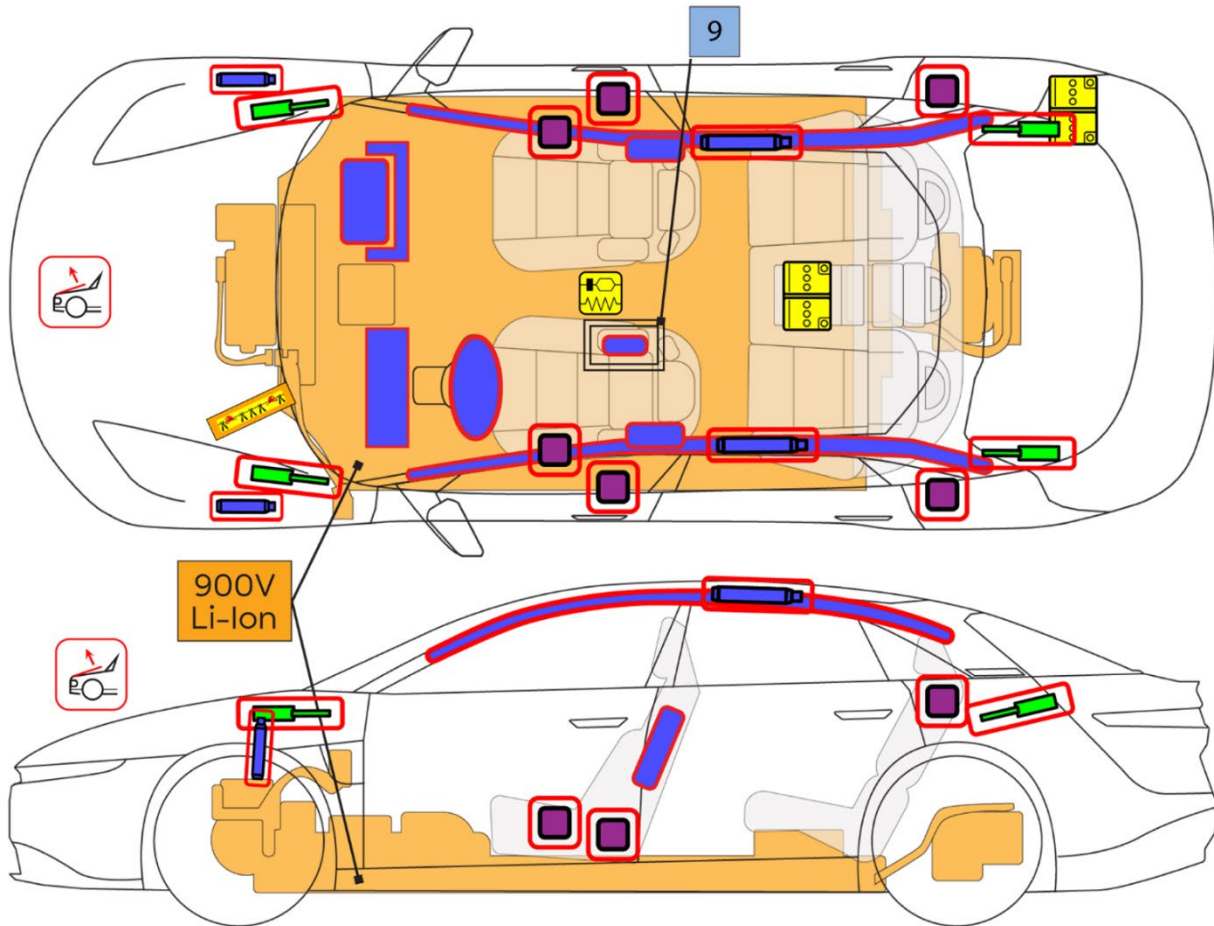

	Airbag		Stored gas inflator		Seatbelt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut / pre-loaded spring		High-strength zone		Zone requiring special attention		High-voltage component
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High-Voltage battery pack		High-voltage power cable / component		High-voltage disconnect		Fuse box disabling high-voltage system		Ultra capacitor, high voltage
	Cable cut								

# LUCID

Document  
50E-AEU22

Version  
01


Date  
20/7/2022

Page  
1 of 4



## 1. Identification / recognition



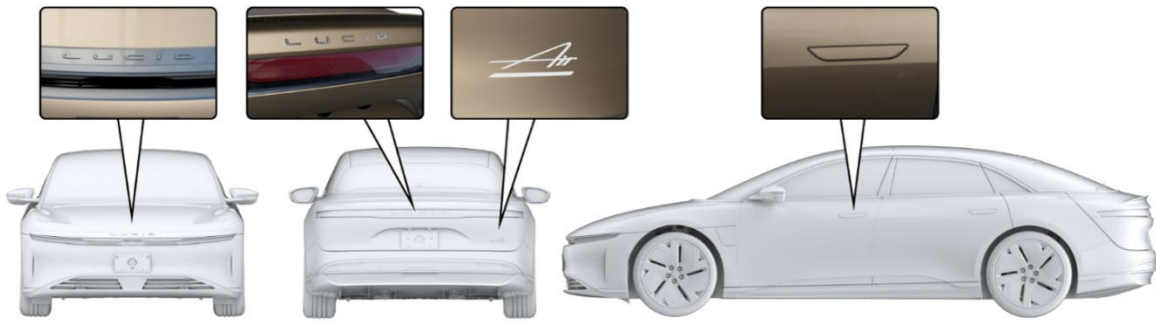


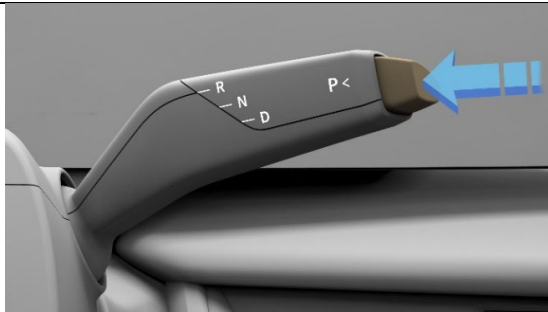
**WARNING** Lack of engine sounds does not mean the vehicle is off. Silent movement or instant restart capabilities exist until vehicle is fully shut down. Wear appropriate PPE.

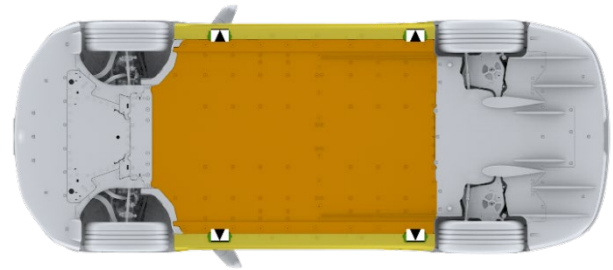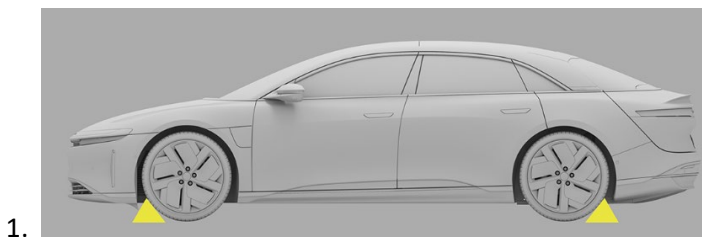



## 2. Immobilisation / stabilisation / lifting




-  Approved lifting points
-  Safe stabilisation points for a Lucid Air on its side.
-  High-Voltage Battery pack- Do not use for lifting or stabilisation



## 3. Disable direct hazards / safety regulations

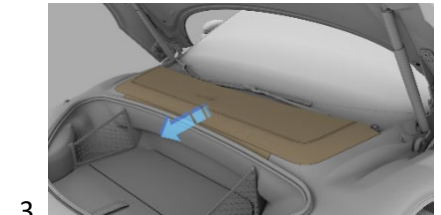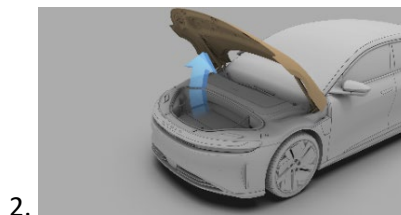

If vehicle is charging, disconnect charger.

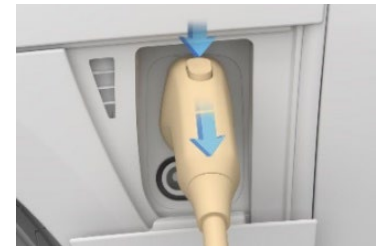



#### 4. Access to the occupants

All windows consist of laminated safety glass.  
**Note:** Rapid extrication activities may require the use of high-pressure punch and glass cutters.



**WARNING** Electrical and mechanical releases may be compromised after a collision.

- If exterior door handles are inoperative, break glass as needed to access interior handles.
- Slide handle back once to unlock the door, then cycle again to open.



#### 5. Stored energy / liquids / gases / solids



**Warning** Never cut, breach, or touch high-voltage components or cabling. Doing so could result in serious injury or death.



		<b>12 Volts Sealed AGM</b>
		<b>900 Volts Li-Ion</b>
		<b>R-1234yf 725 grams</b>
<b>-20° Washer Fluid</b>		<b>Methanol 30-40wt% ≤1Gal./3.8L</b>
<b>High-Voltage systems Coolant</b>		<b>Dex-Cool Glycol based ≤5Gal/19L</b>

#### 6. In case of fire



Only use water to extinguish the battery pack.  
 Submerging the vehicle is not recommended.

For real time support for firefighting/rescue operations involving the Lucid Air,  
 Call 1-855-ESA-SAFE



Potential for reignition exists. Monitor with appropriate equipment.




## 7. In case of submersion

Wear appropriate PPE when handling any submerged vehicle. Submerged vehicles should be staged in a safe area upon removal and monitored for thermal and physical indications of a thermal event for 45 minutes prior to transport. After the vehicle removed from water continue with disabling process. Vehicle should then be drained of water.

## 8. Towing / transport / storage

**Must be towed via flatbed only with wheels off the ground. Dollies are not permitted.**

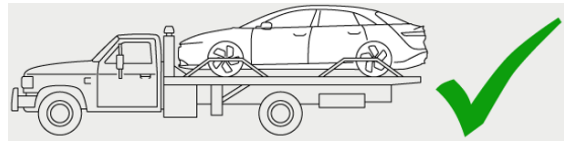

**WARNING** It is possible for the High-Voltage battery to ignite or re-ignite after an incident. Store the vehicle a minimum of 50 feet or 15 metres from other vehicles, structures, and flammable materials for a minimum of 24 hours and monitor temperatures with Thermal imaging Camera.



**WARNING** The vehicle recovery eye cannot be used if the pull angle is greater than 25 degrees from eye centre horizontally or greater than 5 degrees from eye centre vertically. Exceeding these limits may result in serious injury or death.

## 9. Important additional information

Vehicles manufactured for European markets are equipped with additional active safety features such as the Pedestrian protection system and an additional Airbag located in the Driver's seat inboard bolster

**For real time support for firefighting/rescue operations involving the Lucid Air, call 1-855-ESA-SAFE and a rescue specialist will be available 24/7 to answer any questions**

## 10. Explanation of pictograms used

	Class B High-Voltage propulsion system		Explosive		Cable cut
	High-Voltage Battery pack		Flammable		Lifting point
	General warning		Corrosives		Gas Detector
	Warning, High-Voltage electricity		Hazardous to human health		Steering column movement
	Infrared Thermal Camera		Acute toxicity		Lateral seat movement
	Extinguish with water		Environmental hazard		Vertical seat movement