





5-door, 5-seater

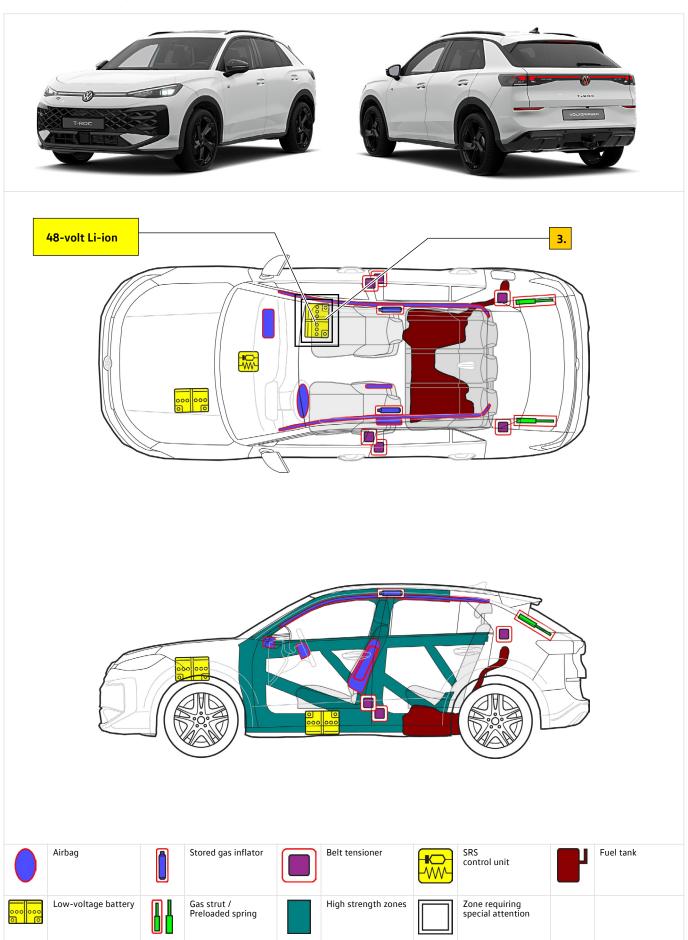



5-door, 5-seater

1. Identification / recognition

"T-Roc" lettering



2. Immobilisation / stabilisation / lifting

Immobilising the vehicle



- Move selector lever to "P" position
- 2 Operate the electronic parking brake in the centre console
- Secure the vehicle to prevent it from rolling away

Lifting points



Appropriate lifting points

3. Disable direct hazards / safety regulations

Switching off the ignition



Press the "Start-Stop" button on the centre console without pressing the brake pedal.



Remove vehicle key, key card and/or smartphone app so that they are more than 5 m away from the vehicle if possible.

Disconnecting the 12-volt battery



In the engine compartment
Disconnect the negative battery terminal



The 12-volt vehicle electrical system voltage is used, among other things, for electrical seat adjustment.



After disconnecting the 12-volt vehicle electrical system voltage, the airbags are deactivated. Unignited airbags can be triggered by heat in the event of a fire!

 Additional information
 Document number
 Version
 Page

 rds_vw_386_022_en
 02 (10/2025)
 2 of 4



Volkswagen T-Roc SUV, from 2025

5-door, 5-seater

Disconnecting the 48-volt battery




In the event of an accident in which the airbag is triggered, the 48-volt vehicle electrical system is automatically deactivated immediately after airbag triggering is detected.

For all other cases, the 48-volt vehicle electrical system can be deactivated as follows:



- Move the right seat all the way back.
- Remove the battery cover in the footwell on the right side of the vehicle.
- Disconnect the control cable and purple battery cables.

4. Access to the occupants



Glass types:

- Laminated glass
- Tempered glass

5. Stored energy / liquids / gases / solids





















12 V











48 V Lithium-ion

6. In case of fire














Lithium-ion batteries can self-ignite or re-ignite after fire-fighting measures! Wear appropriate personal protective equipment!

 \square IR %

7. In case of submersion

After recovery, allow the water to drain and disconnect the battery/batteries (see section 3). Wear appropriate personal protective equipment!

Additional information Version Document number rds_vw_386_022_en 3 of 4



5-door, 5-seater

8. Towing / transportation / storage



A vehicle that has been in an accident must not be towed on its drive axles.

9. Important additional information

Volkswagen Guideline for Rescue Services: www.volkswagen.de

10. Explanation of pictograms used

















Flammable



Hazardous to human health

Environmental

Fuel tank, petrol

Use water to extinguish the fire

Remove smart key

Unlock bonnet





General warning sign

Additional information Version Document number Page 02 (10/2025) rds_vw_386_022_en 4 of 4